
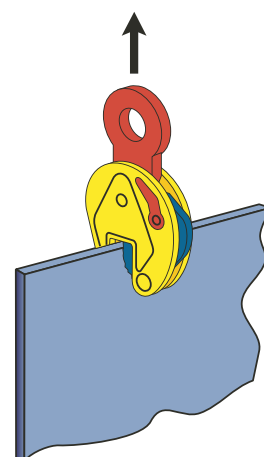
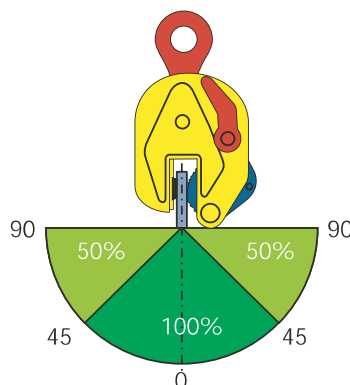



Vertical clamps

TS/STS

- For vertical lifting and transporting of steel plates and structures.
- The TS/STS lifting clamps are equipped with a safety mechanism, ensuring the clamp does not slip when lifting force is applied and when load is being lowered.
- The clamp is locked in closed as well as in open position.
- Lifting capacity and jaw opening are clearly engraved in the body.
- Type STS are supplied with enlarged jaw opening.

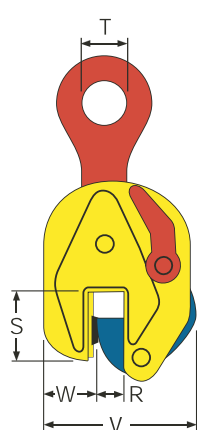


Ref. nr.	Type	Capacity (kg)	Jaw-opening (R) (mm)	Dimensions in mm							Weight (kg)
				S	T	U	V	W	X	Y	
850000	0.75 TS	750	0 - 13	47	30	205	100	25	37	10	1,5
850800	1 TS	1000	0 - 18	55	44	265	135	38	35	15	3,3
850880	1 TSE	1000	0 - 25	55	44	240	142	38	35	15	3,6
850100	1.5 TS	1500	0 - 20	80	65	345	165	55	45	17	6,3
850901	2 TSE	2000	0 - 35	78	65	350	185	55	43	17	6,5
850331	3 TSE	3000	0 - 35	78	65	350	185	55	54	17	6,7
850441	4.5 TS	4500	0 - 25	85	68	430	200	65	67	22	14,8
850451	4.5 TSE	4500	0 - 35	85	68	430	245	64	67	22	15,9
850301	6 TS	6000	0 - 42	114	75	490	255	69	69	25	18,6
850401	7.5 TS	7500	0 - 40	112	75	540	245	58	70	25	24
851501	7.5 TSE	7500	0 - 55	110	75	560	285	70	73	25	25
851551	9 TS	9000	0 - 55	110	80	560	285	70	73	20	26
850501	12 TS	12000	0 - 52	120	84	610	310	110	75	20	42
850601	15 TS	15000	0 - 76	120	90	550	310	110	75	50	71
850605	17 TS	17000	0 - 76	120	90	550	310	110	75	50	71
850700	20 TS	20000	0 - 80	170	100	880	495	140	115	62,5	140
850701	25 TS	25000	5 - 85	170	100	880	495	140	115	62,5	140
850721	30 TS	30000	10 - 90	170	100	880	495	175	155	62,5	145
852000	2 STS	2000	17 - 38	80	63	350	185	58	43	17	6
852451	4.5 STS	4500	25 - 50	85	68	430	225	65	67	22	15
852201	6 STS	6000	28 - 57	120	74	500	275	78	67	25	20
852301	7.5 STS	7500	28 - 62	110	75	540	275	58	73	25	24
852305	9 STS	9000	28 - 62	110	75	560	285	70	73	20	25
852401	12 STS	12000	50 - 100	120	84	610	390	110	75	20	24
852501	15 STS	15000	80 - 150	120	90	550	440	110	75	50	77
852600	20 STS	20000	80 - 150	170	100	880	580	140	115	62,5	145
852601	25 STS	25000	80 - 150	170	100	880	580	140	115	62,5	145
852721	30 STS	30000	80 - 150	170	100	880	580	175	155	62,5	148

Vertical clamps

TSMP/STSMP

- The Terrier lifting clamps TS and STS are also available in MP-version.
- MP-version means that the lifting shackle has a three way articulated linkage arrangement.
- For lifting and transporting of all steel plates and structures.
- When attached to a fixed load bearing arm (e.g. spreader bar) the clamp will retain its flexibility and no chain is needed.
- Due to length of the three way linkage arrangement the clamp can be lowered further between standing plates or structures.
- Lifting capacity and jaw opening are clearly engraved in the body.
- Type STSMP is supplied with an enlarged jaw opening.

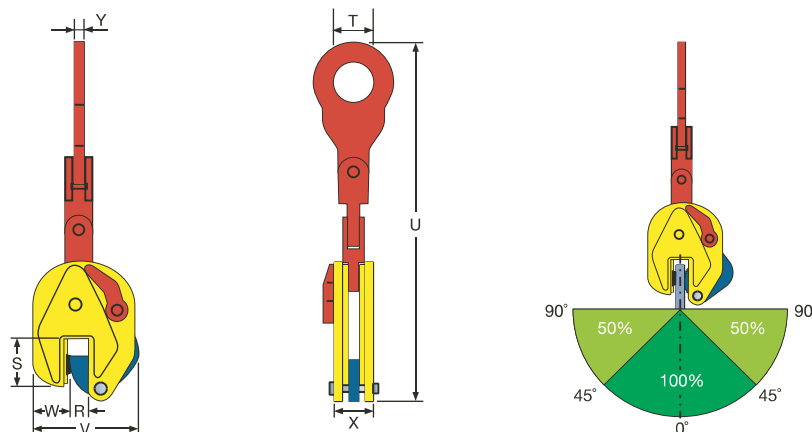

Ref. nr.	Type	Capacity (kg)	Jaw-opening (R) (mm)	Dimensions in mm							Weight (kg)
				S	T	U	V	W	X	Y	
850010	0.75 TSMP	750	0 - 13	47	30	260	100	25	37	10	2
850810	1 TSMP	1000	0 - 18	55	44	313	130	38	35	15	4,2
850818	1 TSEMP	1000	0 - 25	55	45	425	142	38	35	15	4,5
850110	1.5 TSMP	1500	0 - 20	80	65	470	165	51	45	17	7,6
850911	2 TSEMP	2000	0 - 35	80	65	510	180	58	43	17	7,7
850221	3 TSEMP	3000	0 - 35	80	65	515	185	55	42	15	8
850211	4.5 TSMP	4500	0 - 25	85	68	695	200	55	67	22	18,1
851401	4.5 TSEMP	4500	0 - 45	85	68	705	245	64	67	22	19,2
850311	6 TSMP	6000	0 - 32	114	74	760	240	71	69	25	22,8
850411	7.5 TSMP	7500	0 - 40	112	75	820	245	58	70	25	28
851510	7.5 TSEMP	7500	0 - 55	110	75	820	285	70	73	25	30
851515	9 TSMP	9000	0 - 55	110	80	820	310	70	73	20	32
850511	12 TSMP	12000	0 - 52	120	80	960	310	110	75	26	46
850611	15 TSMP	15000	0 - 76	120	90	940	310	110	75	50	79
851615	17 TSMP	17000	0 - 76	120	90	940	310	110	75	50	79
850710	20 TSMP	20000	0 - 80	170	100	1150	495	140	115	62,5	158
850711	25 TSMP	25000	5 - 85	170	100	1150	495	140	115	62,5	158
852010	2 STSMP	2000	17 - 38	80	63	470	185	58	43	17	7,3
852111	4.5 STSMP	4500	25 - 50	85	68	695	225	65	67	22	17
852211	6 STSMP	6000	28 - 57	120	74	760	275	78	67	25	23
852311	7.5 STSMP	7500	28 - 62	112	75	820	275	58	73	25	28
852315	9 STSMP	9000	28 - 62	110	80	820	285	70	73	20	30
852411	12 STSMP	12000	50 - 100	120	84	960	390	110	75	26	47
852511	15 STSMP	15000	80 - 150	120	90	940	440	110	75	50	82
852610	20 STSMP	20000	80 - 150	170	100	1150	580	140	115	62,5	161
852611	25 STSMP	25000	80 - 150	170	100	1150	580	140	115	62,5	161

Vertical clamps


TSU/STSU/TSU-R

- For lifting and transporting of steel plates and structures from all positions (horizontal, vertical and sidelong).
- Articulated lifting shackle.
- The TSU /STSU lifting clamps are equipped with a safety mechanism, ensuring the clamp does not slip when lifting force is applied and when load is being lowered.
- The clamp is locked in closed as well as in open position.
- Lifting capacity and jaw opening are clearly engraved in the body.
- Type STSU is supplied with enlarged jaw opening.

TSU-R

For lifting and transporting of stainless steel plates and structures a TSU-R lifting clamp is available.

- Pivot, cam and cam pin are made of stainless steel.
- Body and lock lever are nickel plated to prevent corrosion due to carbon contamination.

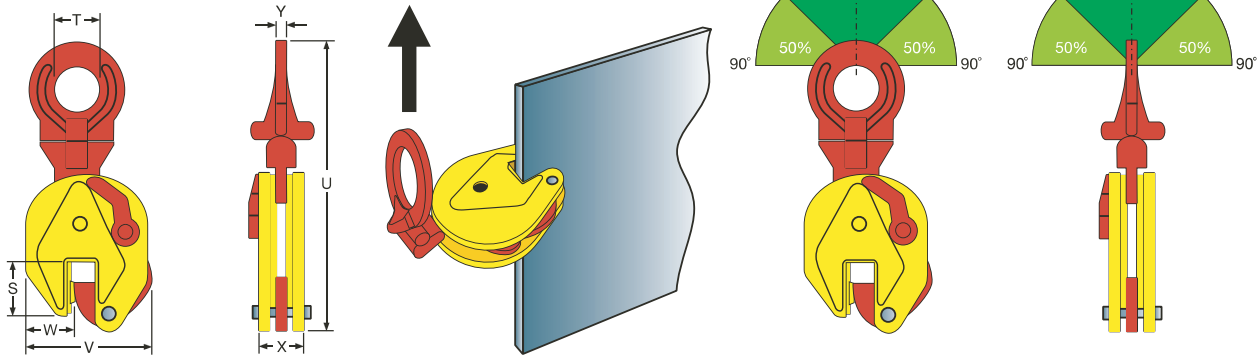


Ref. nr.	Type	Capacity (kg)	Jaw-opening (R) (mm)	Dimensions in mm							Weight (kg)
				S	T	U	V	W	X	Y	
855000	0.75 TSU	750	0 - 13	47	30	210	100	25	37	10	1,7
865100	1 TSU	1000	0 - 18	55	48	300	130	38	35	18	3,5
865800	1 TSEU	1000	0 - 25	55	48	285	142	38	35	18	3,9
855100	1.5 TSU	1500	0 - 20	80	70	350	165	54	45	18	7,2
855601	2 TSEU	2000	0 - 35	80	70	380	180	58	43	18	7,3
865331	3 TSEU	3000	0 - 35	80	70	385	185	55	42	15	7,5
865441	4.5 TSU	4500	0 - 25	85	68	425	235	54	70	25	15,6
865301	4,5 TSEU	4500	0 - 45	85	68	425	245	64	67	25	16,7
865401	6 TSU	6000	0 - 32	115	80	520	245	64	69	32	21
865601	7.5 TSU	7500	0 - 40	112	80	560	245	58	70	32	26
855400	7.5 TSEU	7500	0 - 55	110	80	560	285	70	73	32	30
855405	9 TSU	9000	0 - 55	110	80	650	310	70	73	45	32
865901	12 TSU	12000	0 - 52	120	80	650	310	110	75	45	45
865151	15 TSU	15000	0 - 76	120	80	635	310	110	75	45	75
865155	17 TSU	17000	0 - 76	120	90	635	310	110	75	45	77
865700	20 TSU	20000	0 - 80	170	100	830	495	140	115	75	145
865251	25 TSU	25000	5 - 85	170	100	830	495	140	115	75	148
865230	30 TSU	30000	10-90	170	100	830	495	175	155	75	150
862101	2 TSU-R	2000	0 - 20	80	70	365	165	55	45	18	7,2
856000	2 STSU	2000	17 - 38	80	69	380	185	58	43	18	8
856101	4.5 STSU	4500	25 - 50	85	68	425	225	65	67	25	17
856201	6 STSU	6000	28 - 57	120	80	520	275	78	67	21	32
856301	7.5 STSU	7500	28 - 62	110	80	560	275	58	73	32	40
856305	9 STSU	9000	28 - 62	110	80	650	285	70	73	45	40
856401	12 STSU	12000	50 - 100	125	80	650	390	110	75	45	45
856501	15 STSU	15000	80 - 150	120	80	635	440	110	75	45	80
856600	20 STSU	20000	80 - 150	170	100	830	580	140	115	75	150
856601	25 STSU	25000	80 - 150	170	100	830	580	140	115	75	150
856331	30 STSU	30000	80 - 150	170	100	830	580	175	155	75	155

Vertical clamps

TSHP

- For lifting and transporting of Holland-Profile (HP) and structures with HP-profile.
- Also useful as a "big-jaw" opening clamp.
- Standard with 3 pivots for extra powerful clamping force.
- The Terrier TSHP lifting clamps are equipped with a safety mechanism, ensuring the clamp does not slip when lifting force is applied and when load is being lowered.
- The clamp is locked in closed as well as in open position.

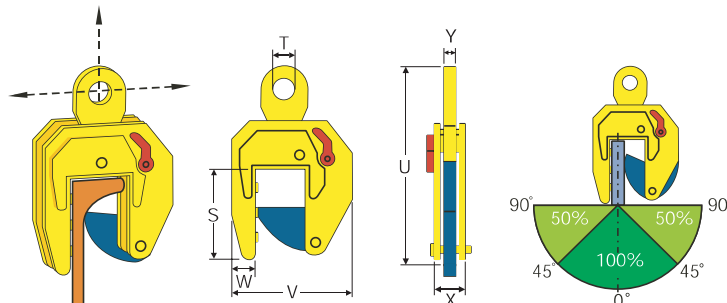


Ref. nr.	Type	Capacity (kg)	Jaw-opening (R) (mm)	Dimensions in mm							Weight (kg)
				S	T	U	V	W	X	Y	
860110	1 TSHP	1000	0 - 80	205	65	530	272	55	52	16	19,5
860111	1.5 TSHP	1500	0 - 80	205	65	530	272	55	52	16	20

TSHPU

TSHPU is a follow-up of the TSHP-1 and TSHP-1.5. It is especially designed for lifting, handling and transporting of HP-profile and construction with HP-profile.

Properties

- capacity 3.0 tons. Opening 0 - 35 mm.
- capacity 5.0 tons. Opening 0 - 45 mm.

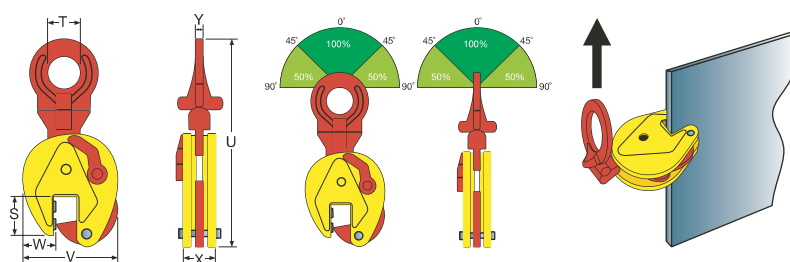


Ref. nr.	Type	Capacity (kg)	Jaw-opening (R) (mm)	Dimensions in mm							Weight (kg)
				S	T	U	V	W	X	Y	
860300	3 TSHPU	3000	0 - 35	90	70	385	185	55	42	15	15
860500	5 TSHPU	5000	0 - 45	110	68	425	245	84	67	25	19

Vertical clamps

TNMK/TNMKA

- TNMK is a NON-MARKING clamp with 2 special synthetic pads. The clamp can be used for lifting, handling and transporting (stainless) steel, aluminium, wood and marble plates.
- After lifting and handling, the clamps leave no markings.
- The clamp is locked in closed as well as in open position.

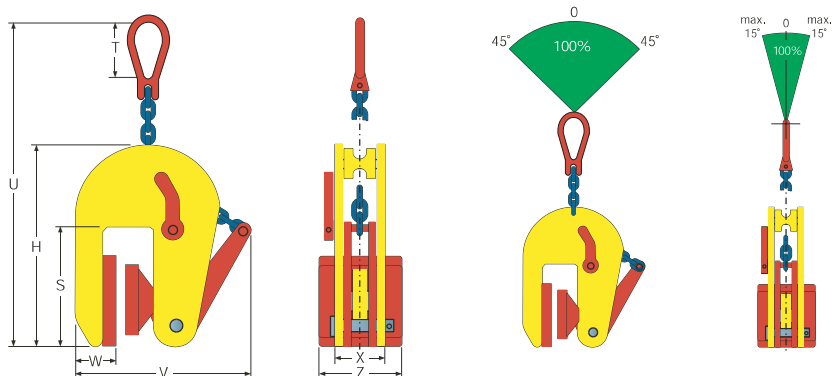


TNMKA

A min. 3 mm/max. 180 mm

B min. 220 mm/max. 400 mm

Adjustable in steps of 20 mm.


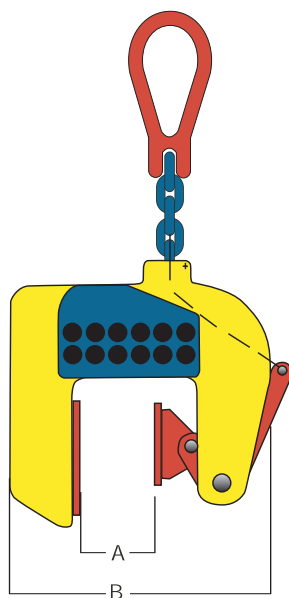


Ref. nr.	Type	Capacity (kg)	Jaw-opening (R) (mm)	Dimensions in mm								Weight (kg)
				H	S	T	U	V	W	X	Z	
862035	0.5 TNMK	500	1 - 20	200	93	65	360	220	48	48	80	5,5
862135	0.5 STNMK	500	17 - 37	200	93	65	360	240	48	48	80	5,5
862005	0.5 TNMKA	500	1 - 180	200	93	65	360	200-340	60	48	80	9
862010	1 TNMK	1000	1 - 30	235	95	80	400	275	46	54	80	6,5
862037	1.5 TNMK	1500	1 - 40	235	95	80	400	275	46	54	80	7,2
862038	2 TNMK	2000	1 - 50	360	120	100	660	380	58	65	80	14
862039	3 TNMK	3000	1 - 60	360	120	100	660	380	58	65	80	15

Vertical clamps

FBK

- For lifting and transportation of steel beams, profiles and structures where the load must stay in position.
- The special shape of the lifting shackle, places the centre of the gravity of the beam to be lifted directly beneath the lifting shackle.
- This maintains the equilibrium of the beam once it has been lifted and keeps the flanges of the vertical so that the beam can easily be stacked or positioned.
- Especially recommended for transportation and stacking of steelbeams (e.g. when sawing of steelbeams, stacking of steelbeams and building of steel constructions).
- Lifting capacity and jaw-opening are clearly engraved in the body.

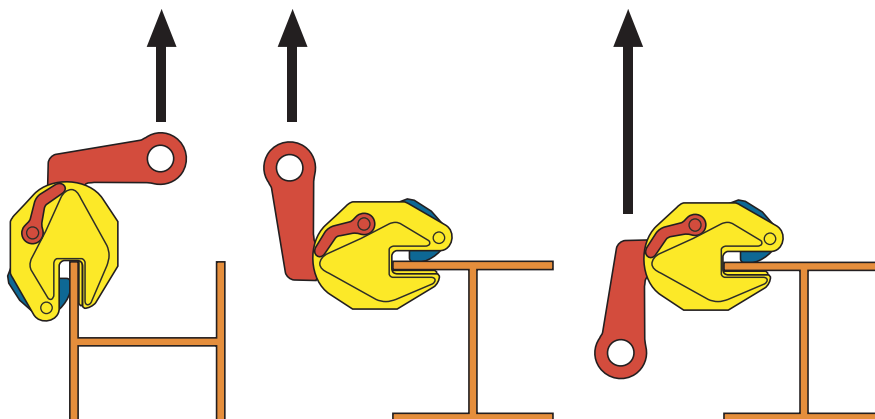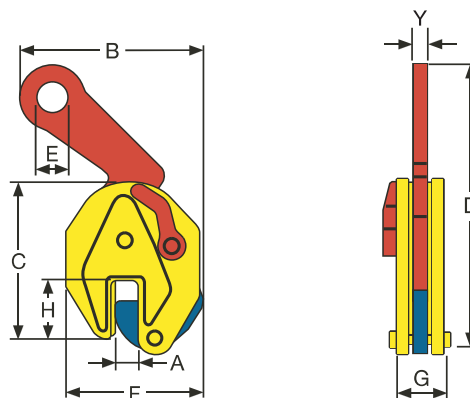

Ref. nr.	Type	Capacity (kg)	Jaw-opening (A) (mm)	Dimensions in mm								Weight (kg/pc)
				B	C	D	E	F	G	H	Y	
851010	1 FBK	1000	0 - 15	200	120	250	21,5	130	35	45	15	3
851000	1.5 FBK	1500	0 - 20	260	200	350	65	170	45	65	15	5
851100	3 FBK	3000	0 - 25	380	200	410	72	205	67	65	30	12